GSCR Series
Float Battery Chargers

Industry's First Choice for Time-Tested Proven Reliability

Single-Phase Input
Three-Phase Input

Applications for: Utility & General Industry
- Switchgear
- Engine starting
- Emergency lighting
- Alarm systems
- Railroad service
- UPS

Communications & Telecommunications
- Radio
- Telemetering
- Microwave
- Telephone

Computers & Control Systems
- Uninterruptible power systems

GNB Industrial Power
A Division of Exide Technologies

JF5010

GNB INDUSTRIAL POWER
A Division of Exide Technologies

GNB Industrial Power GSCR Series of industrial float chargers is designed to automatically control charging rates for a wide variety of battery types and to simultaneously provide full-rated output for both continuous and intermittent dc loads.

The chargers are constant voltage devices with automatic current limiting. Voltage regulation and current limiting are controlled by solid-state integrated circuitry to assure maximum performance in minimum space.

The GSCR Series is ideally suited to utility, communications and other stationary charger applications.

DESIGN FEATURES

Component Selection

- Electronic and electrical components are substantially derated to assure long life and reliability. Typical MTBF is100,000 hours minimum. Components are selected or designed to provide a system life expectancy in excess of 30 years.

Modular Construction

- Control circuits, alarm circuits and electrical sub-assemblies are printed circuit board wired or modularized with plug and socket connections for easy serviceability.

Standard Sub-assemblies

- Control modules and many electrical sub-assemblies are standardized across the entire range of charger sizes. This minimizes spare parts inventory and simplifies maintenance.

Durable

- Front panels are recessed to prevent accidental damage to meters and controls. Standard cabinets are NEMA-1 enclosures of heavy-gauge phosphatized steel with an attractive, long-lasting acrylic enamel finish.

Easy Troubleshooting

- A complete service manual, color-coded wiring, test-point identification and circuit-symbol labeling of internal components make troubleshooting easy.

Ease of Adjustment

- Tap adjustments are not required. Output float voltage, equalize voltage, current limit and alarm levels are potentiometer adjustable.

Ease of Access

- Internal components and connections are easily accessible and/or removable through a hinged front door that opens approximately 180 degrees for easy serviceability.

Ease of Installation

- Cabinets are floor, wall or rack mountable and equipped with knockouts for cable or conduit entrance. Input, output and remote alarm connections are wired to easily accessible, internal terminal blocks.

ENVIRONMENTAL SPECIFICATIONS

Operating Ambient Temperature

- 32°F to 122°F (0°C to 50°C) without derating

Storage Temperature

- -40°F to 185°F (-40°C to 85°C)

Operating Altitude

- 3300 feet (1000 meters) above sea level without derating

Relative Humidity

- 5% to 95% (without condensation)

Audible Noise

- Less than 65dBA at any point 5 feet from any vertical surface of enclosure. Typical values measure 55 to 60dBA at 100% load.

Ventilation

- Units rated 300Adc output or less are convection cooled via NEMA-1 vent openings in cabinet. Units rated 400Adc output or greater have fan-assisted convection cooling with overheat-audible alarm and remote-alarm contacts. (Automatic charger shutdown due to overheat is optional.)

3950 Sussex Ave • Aurora, IL, 60504-7932 • 888.898.4462 (US) • 800.268.2698 (Canada) • www.gnb.com

ELECTRICAL SPECIFICATIONS

AC Input

- Standard transformers are available with taps for nominal voltages as listed below.

Single-Phase Voltages:

- 120/220 – 240V 47 – 63Hz
- 480V 57 – 63Hz
- 120/208 – 240V 47 – 63Hz(optional)

Three-Phase Voltages:

- 208 – 240V 57 – 63Hz
- 380 – 416V 47 – 63Hz
- 480V 57 – 63Hz

Chargers are wired and circuit protected for one nominal input voltage and frequency to be specified at time of order.

Output Regulation

- ±0.5% of DC voltage setting maintained with input line variations of -12%, +10% voltage and/or ±5% frequency
- ±0.5% of DC voltage setting maintained with load variations from no load to full load
- ±1.0% of DC voltage setting maintained against the combined variations of line, load and temperature

Output Transient Response & Recovery

- ±5.0% max. of DC voltage setting maintained with step load changes from 20% to 100% load
- Recovery to ±2.0% of DC voltage setting typically 200msec
- Recovery to steady state DC voltage setting typically 500msec
- Overshoot of DC voltage setting is not present at turn-on due to "soft-start" feature.

Output Current Limit

- The electronic current limiting circuitry is factory set at 110% of rated output. It is continuously adjustable from 90% to 120% of rated load.

Output Ripple and Electrical Noise*

- Unfiltered (SCR Series): Output ripple voltage is less than 10% RMS for single-phase input SCR units. Output ripple voltage is less than 3% RMS for three-phase input SCR units.
- Filtered (SCRF Series): Output ripple voltage is 30mVrms or less for all SCRF units. Electrical voice band noise is less than 32dBrnC using C-message weighting network.

Measured when connected to a battery with an 8-hr., Amp-Hour rating of 4 times the full load current rating of the charger.

Random Parallel Operation

- GSCR Series Chargers may be random parallel operated with other chargers of similar regulation and current limit characteristics. Equal load sharing by two SCR-SCRF chargers requires the addition of the forced load sharing option.

Battery Eliminator Operation

- GSCR Series Chargers will operate as DC power supplies without batteries. Addition of the Filtered Battery Eliminator option will reduce ripple, when used as a battery eliminator, to the greater of 0.06% or 30mV.

GSCR Battery Charger DC Output Table

VDC Nominal	Float Adjustment Range (VDC)	Equalize Adjustment Range (VDC)	ADC Size Cell Available (1)		Lead-Acid Cell Capability (3) (No. of Cells)		Ni-Cd Cell Capability (3) (No. of Cells)	
			1ϕInput	3ϕInput	Normal	Reduced VPC	Normal	Reduced VPC
12	10.5 - 14.5	11.3 - 16	6 to 100	60 to 100	5 - 6		8 - 10	
24	23 - 30	24.5 - 32	6 to 100	50 to 600	11 - 13		17 - 20	21
48	46 - 60	48 - 64	6 to 100	50 to 600	22 - 26	27	34 - 40	42
130	115 - 140	124 - 150	6 to 50	25 to 600	55 - 62	63	86 - 94	98
260	230 - 280	245 - 300	6 to 25	16 to 300	110 - 124	126	172 - 188	196

(1) The discrete Adc sizes offered within the ranges listed above are: 6, 12, 16, 20, 25, 30, 35, 40, 50, 60, 75, 100, 125, 150, 175, 200, 250, 300, 400, 500, 600Adc. All sizes are rated at 100% load. Some current ratings are not available on certain chargers. Consult factory or current price list for exact offerings.
(2) Based on Lead-Acid Float of 2.15 to 2.25V/Cell and equalize of 2.25 to 2.4V/Cell.
(3) Based on Ni-Cd Float of 1.35 to 1.45V/Cell and Equalize of 1.50 to 1.60V/Cell.

GSCR BATTERY CHARGER STANDARD ACCESSORIES

AC On Indicating Light
- Green front panel indicator

AC Input Circuit Breaker
Single-Phase Input:
- Two-pole, 7500 AIC, UL Listed 100A-Frame

Three-Phase Input:
- Three-pole, 7500 AIC, UL Recognized 100A-Frame
- Three-pole, 25000 AIC, UL Listed 225A-Frame
- Three-pole, 30000 AIC, UL Listed 400A and 600A-Frame

DC Output Fuses
- Two-pole, fast-acting, current-limiting rectifier type

AC and DC Surge Suppressors
MOV Type
AC Withstand:
- 240Vac or less: 1500Vpk - 1.2x20 µsec pulse
- Over 240Vac: 3000Vpk - 1.2x20 µsec pulse

DC Withstand:
- All DC outputs: 4000Vpk - 2x10 µsec pulse

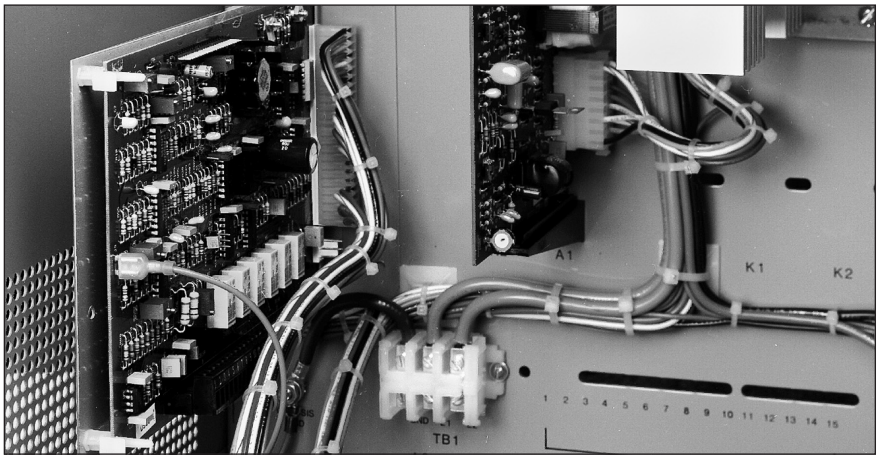

Typical internal construction detail showing combined alarm-status charger monitor option

DC Output Ammeter and Voltmeter
- Front panel, 2% accuracy, 3.5-inch case

Manual Float/Equalize Switch
- Front panel toggle switch

Float and Equalize Adjustment Potentiometers
- Two front panel mounted, lockable adjustment potentiometers

Current Limit Adjustment Potentiometer
- Internally mounted, with easily accessible adjustment

DC Output Blocking Diode
- Standard GSCR Series feature prevents battery from discharging back through the filter and rectifier when charger is "off" due to AC power failure or charger malfunction.

DC Output Protection Diode
- Prevents damage to charger and battery due to reversed polarity connections

Color-Coded Internal Wiring
- 600 Volt, color-coded, polyvinylchloride (PVC) wiring is standard.

Typical GSCR Series One-Lin

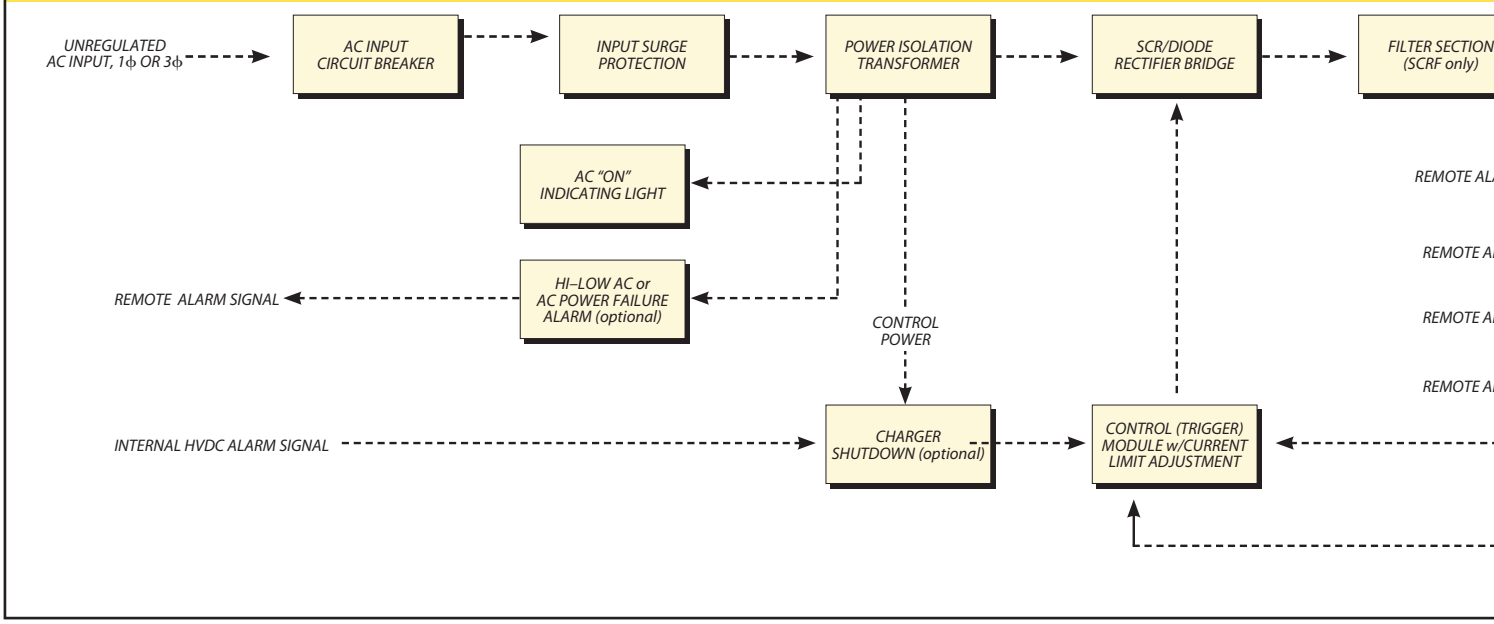
UNREGULATED AC INPUT, 1ϕ OR 3ϕ
AC INPUT CIRCUIT BREAKER
INPUT SURGE PROTECTION
POWER ISOLATION TRANSFORMER
SCR/DIODE RECTIFIER BRIDGE
FILTER SECTION (SCRF only)
AC "ON" INDICATING LIGHT
REMOTE ALARM SIGNAL
HI–LOW AC or AC POWER FAILURE ALARM (optional)
CONTROL POWER
INTERNAL HVDC ALARM SIGNAL
CHARGER SHUTDOWN (optional)
CONTROL (TRIGGER) MODULE w/CURRENT LIMIT ADJUSTMENT

Typical GSCR Performance Curves

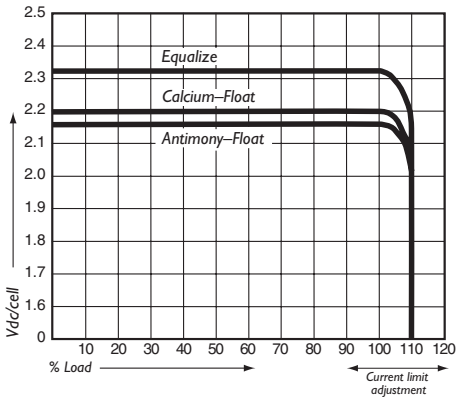

Conversion Efficiency – Single-Phase Charger

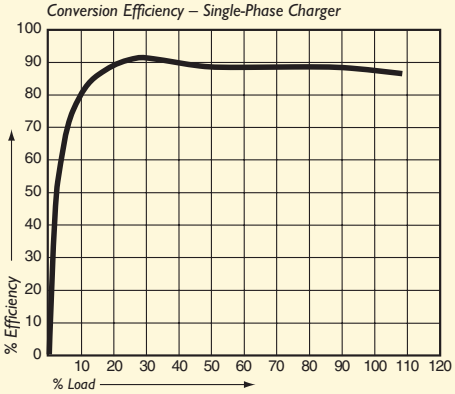

Output Regulation – Ni-Cd Batteries

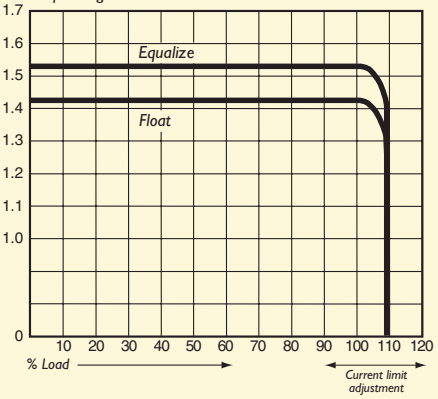

Conversion Efficiency – Three-Phase Charger

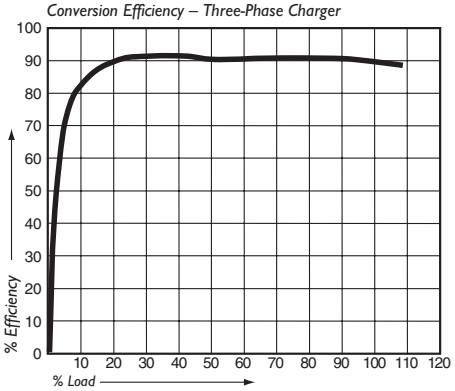

s One-Line Circuit Diagram

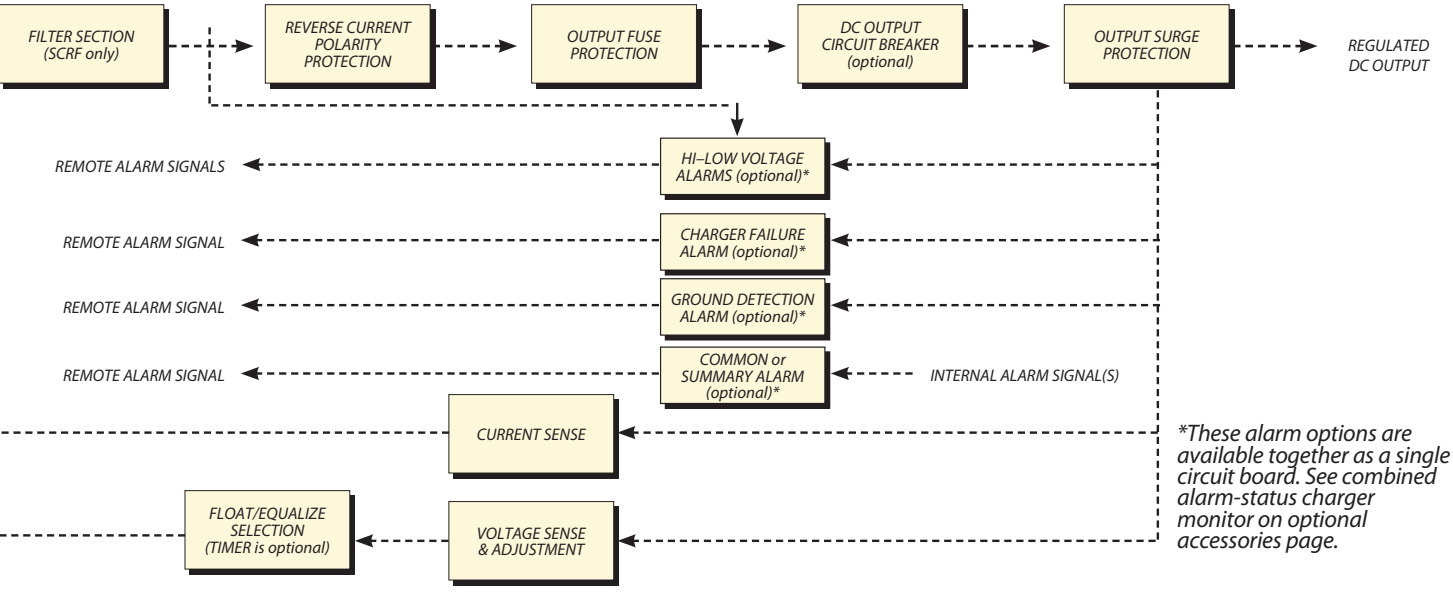

*These alarm options are available together as a single circuit board. See combined alarm-status charger monitor on optional accessories page.

GSCR BATTERY CHARGER OPTIONAL ACCESSORIES

Alarm Relays for Remote Indication*

Available with or without front panel alarm indicating lights

- **AC Power Failure Alarm**
  Provides alarm state when AC power fails or AC breaker is open
- **DC Ground Detection Alarms**
  Provides alarm state when a ground fault has occurred at either the + or – output terminal
- **High-Low DC Voltage Alarms**
  Provides high alarm state when battery is being overcharged and low alarm state when battery is near end of discharge
- **Charger Failure Alarm (No DC Current)**
  Provides alarm state when charger output current is less than 2% of rated output for 30 seconds or more. Will also activate with AC power failure and/or DC breaker or fuse open.
- **Battery Discharging Alarm**
  Provides alarm state when battery discharge current exceeds the charger recharge current
- **End of Discharge Alarm**
  Provides alarm state when battery has discharged to lowest system voltage limit
- **DC Current Limit Alarm**
  Provides alarm state when charger output current reaches the current limit setting
- **Common (Summary) Alarm**
  Provides a single alarm state when any one or all monitored alarm conditions exist on charger

Alarm circuits provide one (1) set of dry form "C" contacts (SPDT) wired to a terminal strip for customer termination. Alarm circuits with two (2) sets of dry form "C" contacts (DPDT) are available without indicating lights at additional cost. Standard relay contacts are rated for resistive loads of: 1A @ 120Vac, 2A @ 28Vdc, 1A @ 52Vdc, 0.1A @ 130Vdc. Auxiliary relays are available for use with alarm circuits when alarm load exceeds the standard contact rating. Auxiliary relay contacts are rated for resistive loads of: 5A @ 120Vac, 5A @ 28Vdc, 2A @ 52Vdc, 0.5A @ 130Vdc.

CASM, Combined Alarm - Status Monitor*

The following alarm relays are available combined together on a single board. Each relay has one (1) set of isolated, dry form "C" contacts (SPDT) wired to a terminal strip for customer connection. Two (2) sets of form "C" contacts (DPDT) are available at additional cost, as are one (1) set of latching relays.

- **High-Low AC Voltage Alarm Relay**
  With high and low indicating lights, 15-second time delay on alarm, auto reset
- **High DC Voltage Alarm Relay**
  With indicating light,15-second time delay on alarm, auto reset
- **Low DC Voltage Alarm Relay**
  With indicating light,15-second time delay on alarm, auto reset
- **Ground Detection Alarm Relay**
  With (+) ground detection indicating light and (–) ground detection indicating light, 15-second time delay on alarm, auto reset
- **Charger Failure Alarm Relay**
  With indicating light, 30-second time delay on alarm, auto reset
- **Common Alarm Relay**
  Summary alarm relay for any one or all alarms on this board.

Alarm contacts are rated for 0.5A @ 120V AC or DC. Indicating lights are red LED's front panel mounted. A "lamp test" switch is provided for verifying operation of indicating lights. Customer terminal strip is rated 15A @ 120V AC or DC to accommodate #14AWG maximum wire. This option may be ordered without ground detection for DC systems that are referenced to ground.

DC Ground Detection for Local Indication

- **Ground Detection Switch for Front Panel DC Voltmeter Indication**
  Measures voltage from + or – output terminals to common ground
- **Ground Detection Indicating Lights with Ground Test & Lamp Test Switch**
  Front panel lamps indicate + or – output ground fault with switch in "ground test" position. In "lamp test" position both lights are verified as operational.

Equalize Timers

- **0-72hr. Manual Equalize Timer w/ or w/o Float Equalize Indicating Lights**
  Replaces float/equalize switch. Charger automatically switches from "equalize" to "float" at end of set time interval.
- **0-72hr. Line Failure Auto-Equalize Timer w/Float Equalize Indicating Lights**
  Charger is switched to equalize for a set time interval after power is interrupted for 10 seconds or more. Equipped with "float reset" and "equalize" override switches.
- **0-72hr. Current Limit Auto-Equalize Timer w/Float Equalize Indicating Lights**
  Charger is switched to equalize for a set time interval after charger is in current limit for 10 seconds or more. Equipped with "float reset" and "equalize" override switches.

AC Fuse

- Two-pole AC fuse for single-phase, 3-pole AC fuse for 3-phase

DC Circuit Breaker

Two-pole DC breaker is installed with one-pole standard fuse:

- 5000 AIC, UL Listed 100A-Frame
- 10000 AIC, UL Listed 250 & 400A-Frame
- 14000 AIC, UL Listed 600 & 800A-Frame
- Optional higher AIC circuit breakers are available.

Forced Load Sharing

- Chargers operating in parallel share load to within 2% of output current of each charger.

High DC Voltage Charger Shutdown

- A contact closure from a high DC voltage alarm activates the shutdown circuit and charger output current goes to zero.

Filtered Battery Eliminator

- Output ripple voltage is 30mVrms or 0.06% of nominal output voltage, whichever is higher, without battery connected.

Input Lightning Arrestors

- Provides additional input protection against lightning-induced transients, ANSI 37.90A

Surge Withstand Capability

- Additional surge protection to meet performance requirements of IEEE-472 SWC specification

AC Input Voltmeter and/or Ammeter

- Front-panel, 2% accuracy, 3.5-inch case, 1% switchboard 4.5-inch case, 0.2% digital

Additional Optional Accessories

- Special input voltages and frequencies
- Device nameplates
- Special paint
- Special high-interrupting capacity
- Fungus proofing (tropicalization)
- NEMA-4 or NEMA-12 cabinets
- (AIC) circuit breakers
- Drip-proof cabinet shields
- Special hypalon internal wiring, switchboard type
- 1% accuracy panel or switchboard meters
- Alarm buzzer
- Cabinet heater strips
- Export packing

3950 Sussex Ave • Aurora, IL, 60504-7932 • 888.898.4462 (US) • 800.268.2698 (Canada) • www.gnb.com

TYPICAL GSCR BATTERY CHARGER INTERNAL CONSTRUCTION DETAIL

STYLE 1A CABINET CONSTRUCTION

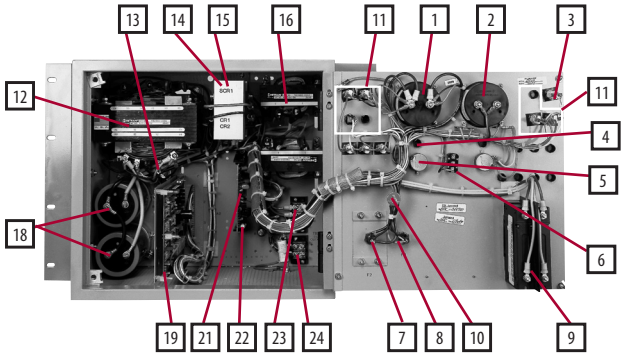

STYLE 1B CABINET CONSTRUCTION

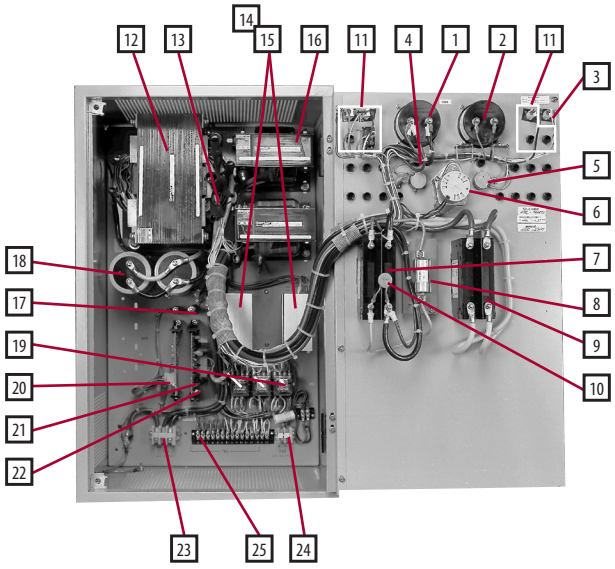

1. DC AMMETER
2. DC VOLTMETER
3. AC POWER "ON" LIGHT
4. EQUALIZE ADJUST LIGHT
5. FLOAT ADJUST POT
6. EQUALIZE TIMER (optional)
   FLOAT EQUALIZE SWITCH (standard)
7. DC CIRCUIT BREAKER (optional)
8. DC FUSE(S)
9. AC CIRCUIT BREAKER
10. DC SURGE SUPPRESSOR
11. STATUS INDICATING LIGHTS
    & SWITCHES (optional)
12. POWER ISOLATION TRANSFORMER
    w/AC RECONNECTION T.B.
13. AC SURGE SUPPRESSORS
14. SCR RECTIFIER/HEAT SINK ASSEMBLY
15. POLARITY & BLOCKING
    DIODE ASSEMBLIES
16. FILTER CHOKE(S)
17. BLEEDER RESISTOR
18. FILTER CAPACITORS
19. ALARM RELAY(S) (optional)
20. ALARM CONTROL MODULES (optional)
21. CONTROL MODULE
22. CURRENT LIMIT ADJUST POT
23. INPUT LINE & GROUND TERMINALS (TB1)
24. OUTPUT TERMINALS (TB2)
25. REMOTE ALARM TERMINALS (TB3)

STYLE 2 CABINET CONSTRUCTION

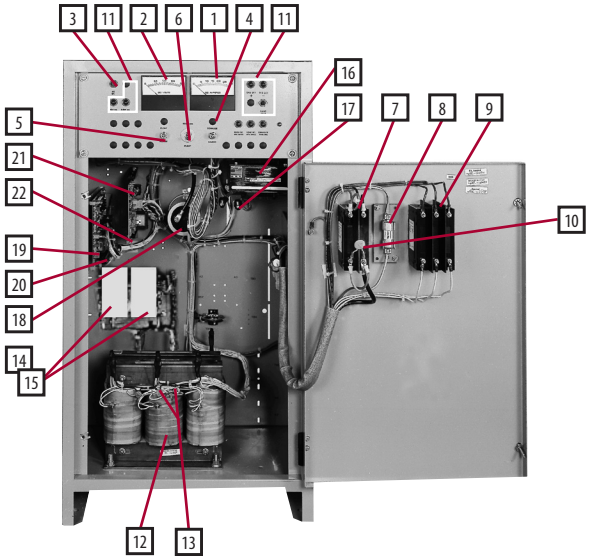

3950 Sussex Ave • Aurora, IL, 60504-7932 • 888.898.4462 (US) • 800.268.2698 (Canada) • www.gnb.com

SCR/SCRF Battery Charger Heat Loss, Size, & Weight Data Table

Ampere Rating*	12Vdc Heat Loss BTU/hr.*	12Vdc Cabinet Style	12Vdc Shipping Weight (approx.) lbs. (kg)	24Vdc Heat Loss BTU/hr.*	24Vdc Cabinet Style	24Vdc Shipping Weight (approx.) lbs. (kg)	48Vdc Heat Loss BTU/hr.*	48Vdc Cabinet Style	48Vdc Shipping Weight (approx.) lbs. (kg)	130Vdc Heat Loss BTU/hr.*	130Vdc Cabinet Style	130Vdc Shipping Weight (approx.) lbs. (kg)	260Vdc** Heat Loss BTU/hr.*	260Vdc** Cabinet Style	260Vdc** Shipping Weight (approx.) lbs. (kg)
Single-Phase Input															
6	70	1A	80 (36)	95	1A	90 (41)	170	1A	105 (48)	370	1B	125 (57)	670	2	230 (104)
12	135	1A	90 (41)	200	1A	105 (48)	330	1A	120 (54)	740	1B	160 (73)	–	–	–
16	180	1A	98 (44)	260	1A	115 (52)	440	1B	135 (61)	990	1B	210 (95)	1790	2	320 (145)
20	230	1A	105 (48)	320	1A	125 (57)	540	1B	160 (73)	1230	1B	220 (100)	–	–	–
25	290	1B	120 (54)	400	1B	135 (61)	680	1B	170 (77)	1540	1B	230 (104)	2790	3	490 (222)
30	340	1B	130 (59)	480	1B	150 (68)	810	1B	190 (86)	1850	1B	250 (113)	–	–	–
35	400	1B	135 (61)	560	1B	160 (73)	950	1B	210 (95)	2150	2	340 (154)			
40	460	1B	145 (66)	640	1B	180 (82)	1080	1B	220 (100)	–	–	–			
50	570	1B	160 (73)	800	1B	190 (86)	1350	2	245 (111)	3080	2	440 (200)			
60	680	2	185 (84)	960	2	210 (95)	–	–	–						
75	850	2	205 (93)	1200	2	245 (111)	2020	2	330 (150)						
100	1130	3	280 (127)	1600	3	320 (145)	2700	3	440 (200)						
Three-Phase Input															
16													1260	2	350 (159)
20										–	–	–	–	–	–
25										1260	2	300 (136)	1960	3	510 (231)
30										1510	2	330 (150)	–	–	–
35				–	–	–	–	–	–	1760	2	355 (161)	2750	3	560 (254)
40				–	–	–	–	–	–	2010	2	380 (172)	–	–	–
50				740	2	210 (95)	1230	2	255 (116)	2510	3	500 (227)	3920	3	590 (268)
60	600	2	215 (98)	880	2	240 (109)	1480	2	320 (145)	3010	3	520 (236)	–	–	–
75	750	2	240 (109)	1100	2	275 (125)	1850	2	350 (159)	3760	3	550 (249)	5880	4	890 (404)
100	990	3	315 (143)	1470	3	360 (163)	2460	3	460 (209)	5010	3	680 (308)	7840	4	1000 (454)
125				1840	3	425 (193)	3080	3	500 (227)	6260	3	750 (340)	–	–	–
150				2200	3	480 (218)	3690	3	540 (245)	7510	4	915 (415)	11800	5	1480 (671)
175				2570	3	510 (231)	4300	3	600 (272)	8760	4	1010 (458)	–	–	
200				2940	3	550 (249)	4920	3	650 (295)	10100	4	1100 (499)	15700	5	1610 (730)
250				3670	4	600 (272)	6150	4	750 (340)	12600	4	1400 (635)	–	–	–
300				4400	4	710 (322)	7380	4	860 (390)	15100	5	1500 (680)	23600	5	1950 (885)
400				5870	4	780 (354)	9830	4	950 (431)	20100	5	1650 (748)			
500				7340	4	850 (386)	12300	5	1350 (612)	25100	5	1820 (826)			
600				8800	4	925 (420)	14800	5	1500 (680)	30100	5	1950 (885)			

**Heat loss in BTU/hr. is stated for nominal number of cells at float voltage and 100% dc load current. **Consult factory for ampere and voltage ratings up to 1000A and 600V.*

GNB Industrial Power, a division of Exide Technology, is a global leader in network power applications including communication/data networks, UPS systems for computers and control systems, electrical power generation and distribution systems, as well as a wide range of other industrial standby power applications. With a strong manufacturing base in both North America and Europe and a truly global reach (operations in more than 80 countries) in sales and service, GNB Industrial Power is best positioned to satisfy your backup power needs locally as well as all over the world.

Based on over 100 years of technological innovation the Network Power Group leads the industry with the most recognized global brands such as ABSOLYTE®, GNB FLOODED CLASSIC®, MARATHON®, ONYX™, RELAY GEL®, SONNENSCHEIN®, and SPRINTER®. They have come to symbolize quality, reliability, performance and excellence in all markets served.

GNB Industrial Power takes pride in its commitment to a better environment. Its Total Battery Management program, an integrated approach to manufacturing, distributing and recycling of lead acid batteries, has been developed to ensure a safe and responsible life cycle for all of its products.

GNB Industrial Power
USA - Tel: 888.898.4462
Canada - Tel: 800.268.2698

www.gnb.com

GB4162 2011-12